

The Freeze Master is easy to use. Just connect the purpose designed freeze heads to the pipework, upstream and down-stream of the area you want to work on. In as little as 5 minutes, two solid ice plugs can be formed allowing you to carry out your repair quickly and efficiently. It will freeze copper, iron, lead or plastic pipes.

It is safe to use. You can leave the machine unattended, and as long as it is connected to the mains, the freeze will continue indefinitely. Unlike a gas freezing method, where a cylinder may run out, there is no danger of ice melting and flooding.

The Freeze Master is not just an alternative to draining down. It represents a fast, clean, efficient and highly professional new service for you to offer your customers.

And as experience has proved, it is a service they are willing to pay for.

Depending on the model you choose, the Freeze Master will freeze any size of pipe from 8mm to 88mm.

- All machines are fitted with new multilayer hoses with fittings and manifold attachments designed for the latest demands in cryogenic apparatus. Manufacturing is carried out with the same strict attention to quality and control inculcated in the former design.
- All case bodies have three openings where hoses and mains lead can be slotted through so the machine can be used with the lid closed.
- All machines are supplied with the recently patented Bungee Clamps (making them the most versatile to fit), freeze cream, insulating towels, gloves, reducer screws and a range of reducers (the smallest to be used on microbore).
- Spare reducer screws are supplied and stored in two panel fixings.
- All microprocessor machines have updated electrical components.
- All machines can freeze copper, iron, lead, plastic pipes, etc. Freeze times are super fast on copper pipes.
- The hoses, mains cable, clamps and fittings are coiled and all stored under the lid.



Model 690E
8-61mm



2" 61mm

- The ezefreeze is an entry level machine designed to freeze up to 28mm. Housed in a tough metal case which includes an ergonomically designed lay flat handle.
- There is easy access to the reducers to freeze 8mm to 28mm which are stored in two panel fixings.
- Freeze Heads retain the original patented features and are designed to fit straight onto 28mm with reducer fittings for 22mm & 15mm which will freeze microbore.



ezefreeze
8-28mm

Capacity	8/10/15/22/28mm		
Dimensions	330 X 315 X 215mm		
Control	Twin capillary		
Freeze time	5 to 20 mins	Span	3.7m
Refrigerant	R407c	Weight	17 kg
Available in	240v	Power	450 watts

- The 280D is distinguished by its all new black case and includes a new ergonomically designed lay flat handle. There is easy access to reducers to freeze 8mm to 28mm which are stored in two panel fixings.
- Freeze Heads retain the original patented features and are designed to fit straight onto 28mm with reducer fittings for 22mm & 15mm which will freeze microbore.

Model 280D
8-28mm



Capacity	8/10/15/22/28mm		
Dimensions	315 X 315 X 270mm		
Control	Active capillary (microprocessor)		
Freeze time	5 to 20 mins	Span	3.9m
Refrigerant	R407c	Weight	18 kg
Available in	240v	Power	450 watts

- The 420D is distinguished by its all new silver case and includes a new ergonomically designed lay flat handle. An easy access storage compartment for reducers to freeze 8mm to 42mm runs along the top rear.
- Freeze Heads retain the original patented features but are designed to fit straight onto 42mm pipes with reducer fittings for 35mm 28mm 22mm & 15mm. The 420D aluminium heads & reducers have a smart silver finish.



Model 420D
8-42mm

Capacity	8/10/15/22/28/35/42mm		
Dimensions	360 X 300 X 340mm		
Control	Active capillary (microprocessor)		
Freeze time	5 to 45 mins	Span	3.9m
Refrigerant	R407c	Weight	23 kg
Available in	240v or 110v	Power	550 watts

- The 690E is distinguished by its all new midnight blue case and includes a new ergonomically designed lay flat handle. An easy access storage compartment for reducers to freeze 8mm to 61mm runs along the top rear.
- Freeze Heads retain the original patented features and are designed to fit straight onto 2" Iron (61mm OD) with reducer fittings for 54mm 49mm 42mm 35mm 28mm 22mm & 15mm. The 690E aluminium heads & reducers have a smart silver anodised finish.
- The 690E is a new replacement model for large industrial use and is smaller, lighter, yet just as powerful. The 690E is exactly what the market had requested.

Capacity	8/10/15/22/28/35/42/49/54/61mm		
Dimensions	390 X 300 X 355mm		
Control	Active capillary (microprocessor)		
Freeze time	5 to 65 mins	Span	3.9m
Refrigerant	R407c	Weight	27 kg
Available in	240v or 110v	Power	850 watts

690 Upgrade Kit

This kit adapts 61mm machines to freeze 2 1/2" & 3" ID Steel pipes (76mm & 88mm OD). It is supplied in a neat carry case and comprises 2 x 2 1/2" and 2 x 3" adaptors, 2 x towel wraps, tube of freeze cream and large clamp.



The elliptically shaped 2 1/2" and 3" upgrade components have been developed to increase the pipe range of the 61mm machines.
Kit contents: 2 x 2 1/2" Adaptors 2 x Reducer Screws
 2 x 3" Adaptors 2 x Freeze Head Wraps
 1 x Tube Freeze Cream 1 x Long Clamp



How it works. At the heart of every Industrial Freeze Master is a unique microprocessor electronic control unit (*Active Capillary*). A state-of-the-art innovation designed developed and patented by Freeze Master Ltd specifically for electric pipe freezing machines. The compressor achieves lower head pressures resulting in enhanced cooling and ultra rapid pull down temperatures. Only genuine Freeze Master machines incorporate this electronic valve control system. Also machines built by Freeze Master and name branded for other companies, have the same design features.

Active Capillary (*With the Freeze Master valve control*). You can freeze a hot pipe, whilst at the same time freezing a cold pipe, without the risk of a concentration of refrigerant in the freeze head attached to the coolest pipe. You can freeze a large and a small pipe with the same benefit.

Taking control. The electronic valve system takes the place of the simple basic capillary and works by delivering preprogrammed quantities of refrigerant to the freeze heads. This presents several advantages unique to Freeze Master as refrigerant is electronically distributed maintaining a more stable freeze.


Without Freeze Master electronic control (*Basic Capillary*). When a freeze head is attached to a warm water or hot water pipe, the pressure inside the freeze head is greater than that attached to a cold water pipe. Refrigerant could favour the freeze head attached to the coolest pipe. This could impair the freezing ability of the head attached to the hottest pipe.

FREEZE MASTER

Pipe Freezing for Professionals



Pipe Chart

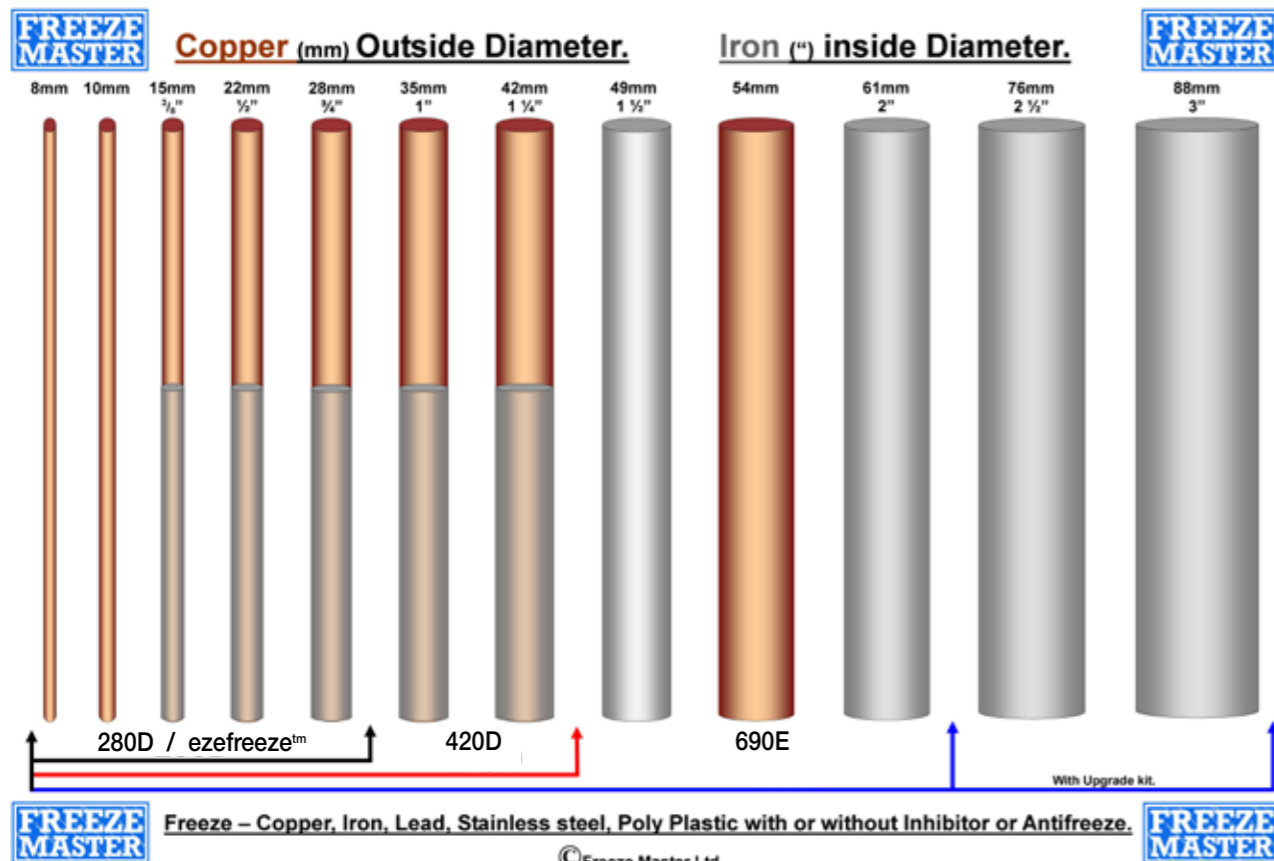

Freeze Master Ltd

Unit A1, Connaught Business Centre,
Hyde Estate Road, West Hendon,
London, NW9 6JL

Tel: 020 8205 7672

Fax: 020 8205 7674

for more information please visit our website

www.freezemaster.co.uk