




**Angle Grinders**  
GA7020/ S, GA7021 180mm (7")  
GA9020/ S 230mm (9")

Satisfy Professional's Needs



**ROBUST  
CREATURE**

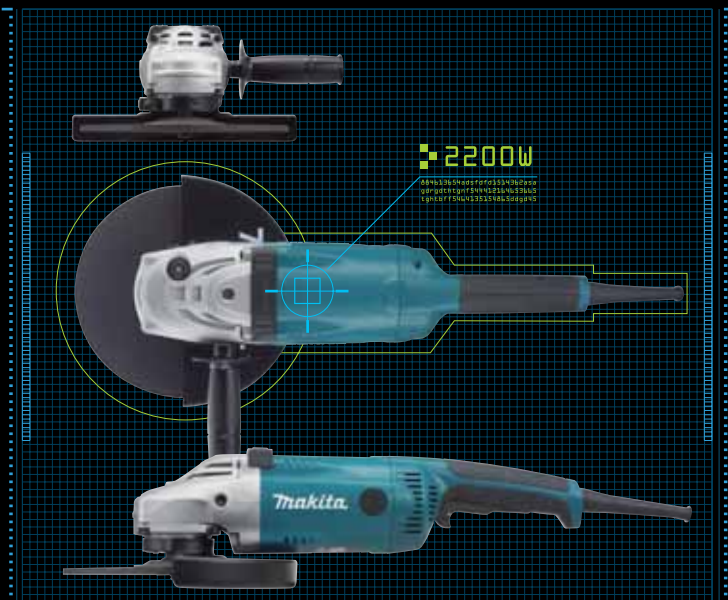

# Heat Resisting Robust Creature 2,200W


## Performance data

### Efficiency of concrete cutting

Test conditions : Cut concrete to depth of 30 mm.


#### 180mm Angle Grinder Models

Diameter of equipped wheel : 180 mm (7")



#### 230mm Angle Grinder Models

Diameter of equipped wheel : 230 mm (9")



Numbers in the charts above are relative values when setting Competitor "B" capacity as 100. It may differ under some conditions.

## Option

**Wheel Guard**

Standard equipment  
180mm (7") Part No. 154674-0  
230mm (9") Part No. 154672-4

**Anti Vibration AVT Grip**

Part No. 162240-9

**Dust Collecting Wheel Guard** Part No. 193002-4

**Dust Covers** Part No. 194289-1  
protect motor from metal dust.

## Angle Grinder

## GA7020/ S, GA7021, GA9020/ S

204



- Double Insulation
- Soft start (GA7020S, GA9020S only)

	GA7020/ S	GA7021	GA9020/ S
<b>Continuous rating Input</b>	2,200W	2,200W	2,200W
<b>Capacity</b> Depressed center wheel:	180mm (7")	180mm (7")	230mm (9")
Wire cup brush:	110mm (4-3/8")	110mm (4-3/8")	110mm (4-3/8")
Cut-off wheel :	180mm (7")	180mm (7")	230mm (9")
<b>No load speed</b>	8,500 rpm	6,600 rpm	6,600 rpm
<b>Dimensions</b> (L x W x H)	473 x 200 x 140mm (18-5/8" x 7-7/8" x 5-1/2" )	473 x 200 x 140mm (18-5/8" x 7-7/8" x 5-1/2" )	473 x 249 x 140mm (18-5/8" x 9-3/4" x 5-1/2" )
<b>Net weight</b>	4.7kg (10.4lbs)	4.7kg (10.4lbs)	4.7kg (10.4lbs)
<b>Power supply cord</b>	2.5m (8.2ft)	2.5m (8.2ft)	2.5m (8.2ft)

Standard equipment : Lock Nut Wrench, Grip (Tool does not come with depressed center wheel)

Items of standard equipment and specifications may differ from country to country.



Makita Corporation

3-11-8, Sumiyoshi-cho, Anjo, Aichi 446-8502, Japan