




# IMPORTANT SAFETY NOTES




ALWAYS READ, AND FOLLOW THE INSTRUCTIONS BEFORE USING THE PODIUM




NEVER USE THE PODIUM WITH DAMAGED OR MISSING COMPONENTS




NEVER OVERREACH




NEVER HAVE MORE THAN ONE PERSON ON THE PLATFORM




NEVER USE ON UNEVEN OR SLOPING SURFACES




NEVER MOVE A PODIUM IF A PERSON IS STILL ON IT.



NEVER USE BOXES FOR EXTRA HEIGHT, STAND ONLY ON THE PLATFORM.



NEVER USE PODIUMS AS A MEANS OF ACCESS TO ANOTHER PLACE



NEVER USE PODIUMS NEAR ELECTRICAL POWER LINES

## BEWARE OF THE FOLLOWING:-

- A. DO NOT USE ON LOOSE OR SLIPPERY SURFACES.
- B. NEVER STAND ON THE ACCESS LADDER TO WORK.
- C. WORKING PLATFORM MUST BE LEVEL.
- D. INSPECT BEFORE USE.
- E. ONLY ASCEND OR DESCEND THE LLWP USING THE ACCESS PROVIDED.
- F. FACE THE BACK SECTION WHEN ASCENDING OR DESCENDING.
- G. DO NOT TIE THE GATES BACK, ENSURE GATES ARE CLOSED BEFORE USE
- H. BEWARE OF FINGURE TRAPS.
- I. TO MOVE UNIT DISMOUNT AND USE JOCKEY WHEEL TO RE-LOCATE.
- J. IF IN DOUBT DO NOT GUESS, CONSULT YOUR SUPPLIER.
- K. SEE OVERLEAF FOR COMPONENT CHECKLIST.

# PAS 250 1000 PODIUM ASSEMBLY GUIDE



Dimensions — Platform at 1M Width - 0.65M x Depth 1.3M  
 Working Height — 3M (MAX)  
 Dimensions — Folded Height - 2.05M x Width - 0.25M x Depth - 1.3M  
 Weight — 1000 33KG (without stabilisers)

Safe working Load 150Kg  
 Manufactured under an ISO9001:2008 Quality System  
 Complies fully with the Working at Height Regulations 2005 and BS8620  
 Specifications  
 Lightweight all Aluminium Construction

For further information or assistance, please contact  
 Interlink Alloy Systems Limited—Tel 01992 716509  
 Or visit: [www.interlinkalloy.co.uk](http://www.interlinkalloy.co.uk)

# PAS 250 1000 PODIUM UNIT ASSEMBLY GUIDE




- 1) STANDARD COMPONENT LIST  
 1 X FOLDING FRAME      1 X PLATFORM  
 1 X LADDER              2 X STABILISER  
 2 X GUARDRAIL BRACE

2) OPEN FRAME AND PULL FOLDING  
 BACK OUTWARDS UNTIL MECHANISM

3) FIT PLATFORM AT REQUIRED  
 PLATFORM HEIGHT  
 ( LOWER LEVEL SHOWN )

4) CLIP UPPER BRACE OF LADDER  
 ABOVE RINGS ON VERTICALS WITH  
 ASSEMBLED HOOKS AT TOP

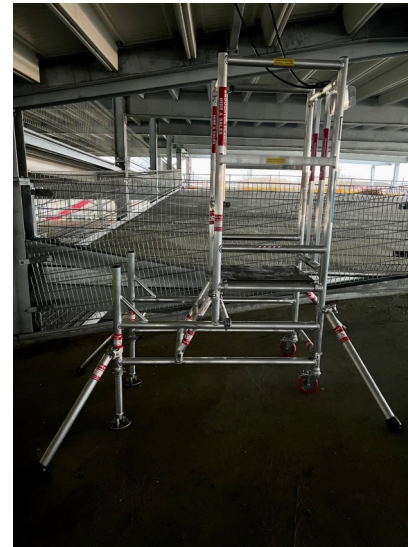

**IMPORTANT NOTE :-**  
 DO NOT TIE THE GATES BACK ON TO  
 SIDE FRAMES, THEY SHOULD ALWAYS  
 BE CLOSED BEHIND YOU WHEN WORKING  
 AND FACING THE FRONT OF THE PODIUM.  
 ALWAYS WORK FACING REAR FOLDING  
 FRAME

5) FIT STABILISERS TO BACK VERTICALS

OFFSET CASTORS SHOWN ON GENERAL ASSEMBLY  
 BUT SOME PODIUMS MAY HAVE SWIVEL CASTORS  
 FITTED AT THE BACK

FOR SPECIAL APPLICATIONS AS ABOVE ( ON SLOPING GROUND )  
 ENSURE CASTOS ARE LOCKED AND ALL STABILISERS ARE FITTED  
 CORRECTLY AND, IF POSSIBLE, BASE PLATES SHOULD BE FITTED.  
 BEWARE OF FLOOR CONDITIONS IE GREASE OR ANY SLIPPERY  
 SUBSTANCES WHICH MAY CAUSE THE PODIUM TO SLIP.

